

ALL  
PARAMETERS

WITH SMALL BODY SIZE, IT IS CONVENIENT TO OPERATE IN NARROW SPACE, ESPECIALLY SUITABLE FOR NARROW STREETS, WAREHOUSES, WORKSHOPS, DOCKS, SHIP DECKS AND EVEN CABINS IN CITIES.MULTIPLE ATTACHMENT COMPATIBILITY, WORK WITH ALL KINDS OF ACCESSORIES, INCLUDING BUCKETS, FORKS, AUGERS, TRENCHERS AND SO ON!

MACHINE RATING		DIMENSIONS	
Engine Brand	B& S/RATO/KOOP	Height at Maximum Extension	2450mm
Rated Power	15-18KW/HP	HeightTo the the bucketpin	1870mm
Rated Speed	3600rpm	Vehicle height	1350
Number of cylinders	2	Maximum Height as Lay the bucket flat	1810mm
Air intake way	Naturally Aspirated	Total length without appendages	1680mm
Displacement	639cc	Length With standardbucket	2206mm
Emissions Standards	EUR 5	Maximum height unloading Angle	34
Rated Operating Capacity	380Kg	Dumping Height	1510mm
Maximum Operating Capacity	500Kg	Discharge Distance	450mm
Maximum Breakout Force	450KN	The flip Angle of the bucket on the ground	27
Bucket Capacity	0.12m³	Bucketflip Angle at highest Pos	114
Driving Speed	0-6km/h	Wheel Base	850mm
TotalCydng Time	9s	Ground Clearance	150mm
System Operating Pressure	17-21bar	Tail Length	280mm
FuelTank Capcity	10L	Wheel base(standardtire)	720mm
Operating Weight	1200Kg	Vehicle width(standard tire)	960mm
Tyre Size	18*72	Bucket width	1000mm

SHANDONG CARTI MACHINERY CO., LTD ●  
TEL:+86 0537-2330670 ●  
FAX:+86 0537-2330670 ●  
EMAIL: CARTIWELL@126.COM ●

NOTE: UE TO TECHNOLOGICAL UPGRADES, THE ACTUAL PRODUCT MAYBEDIFERENT FROM WHAT IS SHOWN. ●  
DIAGRAMS, PHOTOS, AND INFOR-MATIONARE FOR REFERENCE ONLY



SKID STEER  
LOADERS

SUITABLE FOR ALL TERRAIN



CW-460



# MAIN ADVANTAGE

## COMPACT AND MANEUVERABLE DESIGN

CW-460 mini skid steer loaders excel in tight spots where others can't go, smoothly navigating small indoor and outdoor spaces. Their compact design fits through doorways and gates and makes loading onto trailers a breeze.



## HYDROCYLINDER

As one of the key components, the stability and reliability of hydraulic cylinder are very important for the performance of the whole machine. The flow and pressure of hydraulic oil can be accurately controlled by adjusting the valve.



## EFFICIENT WORKING ABILITY

It has high working efficiency, and can quickly replace or hook various working devices according to the operation requirements, such as loading bucket, digging bucket, bulldozer, broom, etc., so as to realize various operation efficiency.

## EASY JOYSTICK CONTROL

The left and right joystick and the middle joystick are easy to use, and the driver can realize various functions of the loader through simple operation.



## RADIATOR OPEN MAINTENANCE

Larger radiator, Using a hydraulic oil radiator with large heat dissipation capacity, An outer frame is sleeved outside the radiator and can be opened for maintenance.



## RESERVE MULTIPLE PIPELINES

Reserved multiple quick-change pipelines Quickly change different work aids to adapt to more working environments



## RUBBER TRACK

Optional heavy block to increase stability The guard plate protects the wheel more durable



**\*BUCKET CAN BE CHANGED FOR VARIOUS ACCESSORIES**





## The hydraulic oil radiator

The hydraulic oil radiator (with temperature sensor) is arranged separately from the engine to solve the problem of high temperature heat dissipation.

## fuel tank

The oil tank is arranged at the lower side, which makes the engine absorb oil more fully, stabilizes the speed and improves the performance of the loader.

## oil pipe


80% of the whole car is arranged with steel pipes (oil pipes), which is more durable and assists in heat dissipation.



# SERVICE AND SECURITY

Modular design, convenient maintenance!

## Wide driving area

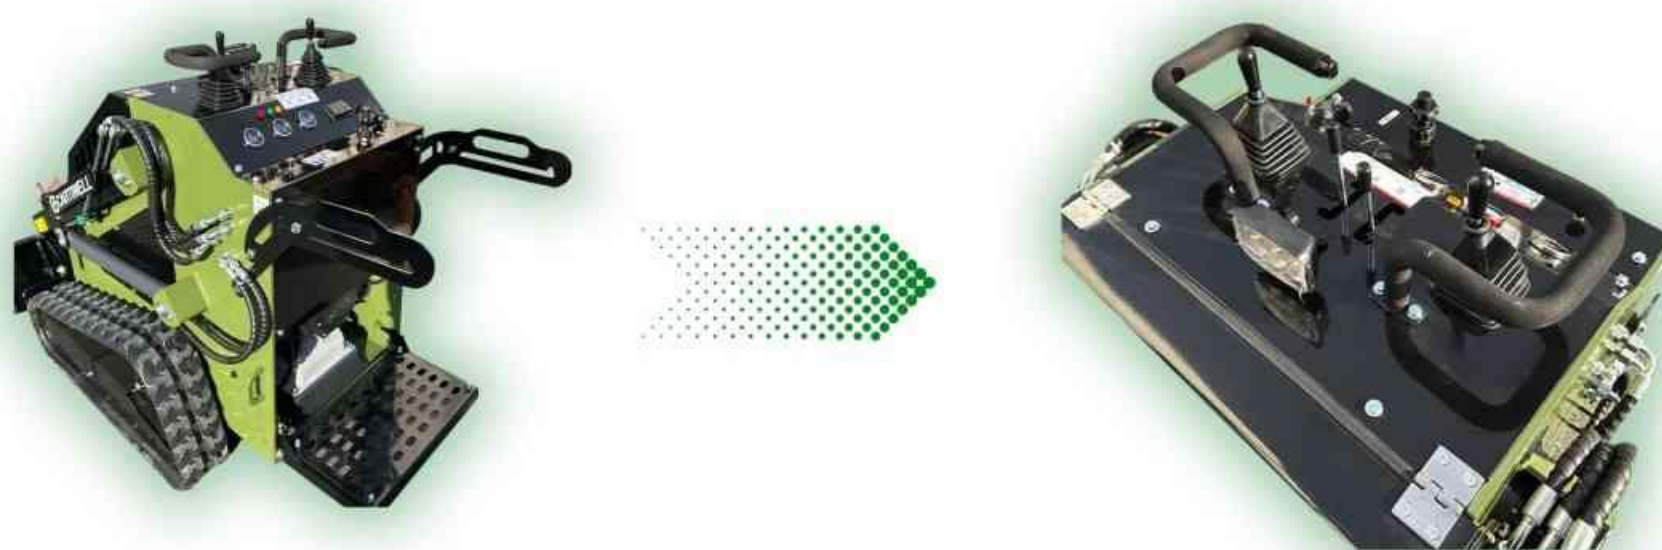

## Humanized design makes driving safe.

The standing area provides enough space for the operator to move, with strong load-bearing capacity. The ergonomic principle is considered in the design, and the operating handles and buttons are within reach.

# Driving operation function



## pilot lever

It is used to control the boom lifting, bucket overturning and driving direction of the loader.

## Display screen

used to display various working conditions and parameters of the loader, such as engine hours, generator charging status, fuel display, etc.

## Function switch

including light switch, horn switch, etc. Before operating the skid steer loader, all switches and buttons on the operation panel must be thoroughly inspected to ensure their normal operation.

**LEARN MORE DETAILS ABOUT THE CONSULTATION CARTIWELL!**