

MACHINE RATING		DIMENSIONS	
Engine Brand	B&S/RATO/KOOP /KUBOTA	Height at Maximum Extension	1980mm
Rated Power	15-25KW/HP	Height To the the bucketpin	1870mm
Rated Speed	3600rpm	Vehicle height	1350mm
Number of cylinders	2	Max Height as Lay the bucket flat	1810mm
Air intake way	Naturally Aspirated	Total length without appendages	1680mm
Displacement	739cc	Length With standard bucket	2206mm
Emissions Standards	EURO5/EPA	Max. height unloading Angle	34°
Rated Operating Capacity	350Kg	Dumping Height	1510mm
Max. Operating Capacity	450Kg	Discharge Distance	450mm
Max. Breakout Force	0.99KN	The flip Angle of the bucket on the ground	27°
Bucket Capacity	0.13m³	Bucketflip Angle atthighest Pos	114°
Driving Speed	0-6.5km/h	Wheel Base	850mm
TotalCyding Time	9s	Ground Clearance	150mm
System OperatingPressure	16bar	Tail Length	280mm
FuelTank Capacity	10L	Wheel base	720mm
Operating Weight	800Kg	Vehicle width	960mm
Tyre Size	200*72*37mm	Bucket width	1000mm

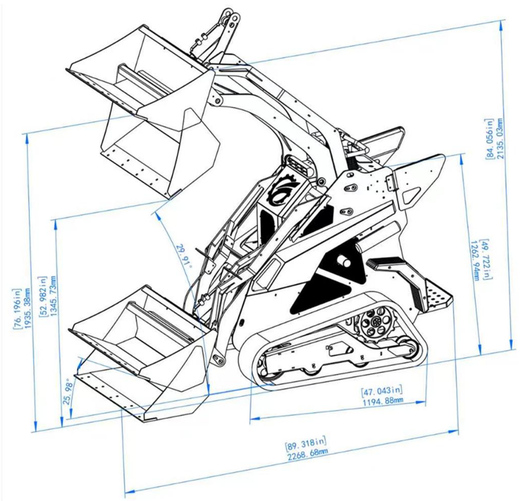

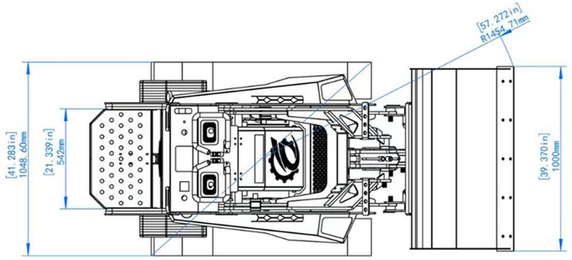

HONESTY CREATES THE FUTURE
QUALITY CREATES BRILLIANCE

CARTIWELL

CARTIWELL MINI SKID STEER LOADER

CW-480X

Cw-480x is used for efficient operation in narrow sites, indoor sites, greenhouses, farmland and narrow construction areas where large machinery cannot enter.



MUCH MORE ADVANTAGE
SKID STEER LOADER CW-480X

DESIGN



Folding armrest; rubber pad
Improve the comfort and safety of drivers.



Unilateral 45kg counterweight
Can adjust the weight of the whole machine.



Rubber track/ wheeled track
Match different ground conditions to maximize machine utilization.




Operating handle
The whole machine operation control handle belongs to a pilot hydraulic control assembly.

Hydraulic quick-connect pipe
Two-way output, with 6 oil pipes on both sides.



Hydrocylinder
Machine flow is 48L/min. Auxiliary device flow rate is 38L/min.

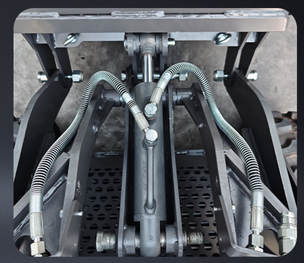

Bucket
High-density steel plate is welded, and the front end is equipped with replaceable wear-resistant shovel teeth.

CW-480X

TAME A NARROW SPACE


- Compact fuselage
- Smooth lifting
- Powerful power
- Support customization





Driving panel

Double joysticks make it possible to work in a narrow space with zero steering maneuverability. Safety ring handrails ensure stable operation and unobstructed vision. Quick switch of various accessories. Integrated LCD displays real-time machine data. Equipped with emergency stop, light and key switch to ensure high safety. Compact layout, easy operation and simple maintenance.

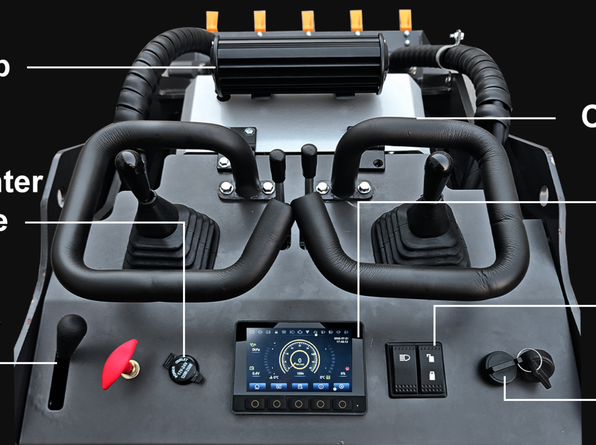



Powerful engine

RATO 739CC、HONDA GX690 and KUBOTA D722/D902 engines, with open engine compartment design, facilitate the maintenance of filters and oil, and save maintenance time and cost.

