CWD-500B Mini dumper

RELIABLE SAFETY PERFORMANCE



TECHNICAL PARAMETER

PROJECT	DATA
Specification/Models	CWD-500B
Gasoline Engine	9HP,270CC
Net weight	390kg
Transmission	3F+1R
Ting Method	Hydrauliel
Max Loading Capacity	500kg
Bin	1000*700*450mm

SHANDONG CARTI MACHINERY CO., LTD

TEL:+86 0537-2330670

FAX:+86 0537-2330670

EMAIL: CARTIWELL@126.COM

NOTE: UE TO TECHNOLOGICAL UPGRADES, THE ACTUAL PRODUCT MAYBEDIFERENT FROM WHAT IS SHOWN. DIAGRAMS, PHOTOS, AND INFOR-.MATIONARE FOR REFERENCE ONLY

GET THE 1YR/1000HR FREE SERVICE

CARTIWELL


HYDRAULIC SELF UNLOADING BUTTON START MINI DUMPER

CWD-500B



ISO CE EPA EURO5

ALL TERRAIN UNIVERSAL , EFFICIENCY DOUBLED

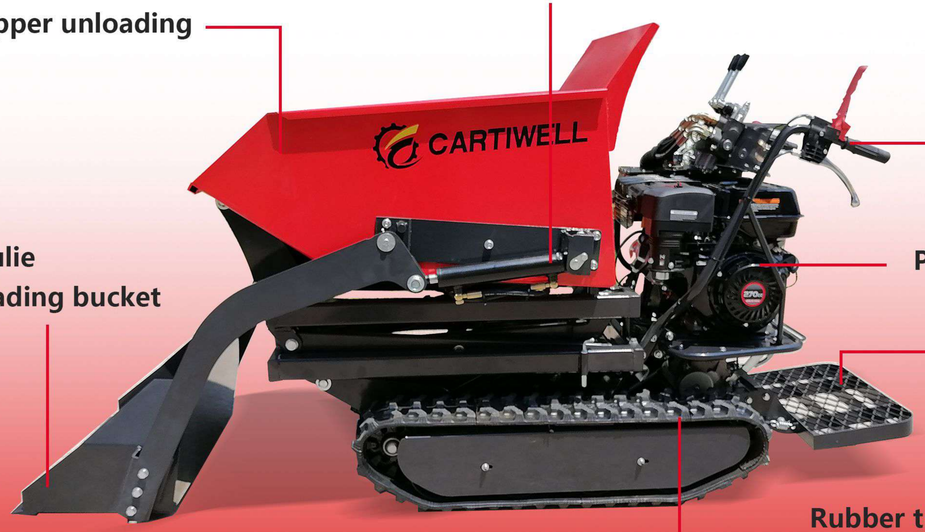

Easy loading and unloading without effort



HYDRAULIC SELF-DISCHARCE


Hydraulic lifting,Not easy to rust
One-click start,Easy loading and unloading



RUBBER TRACK

Engineering rubber track
Strong grip,Good climbing performance
wear-resistant



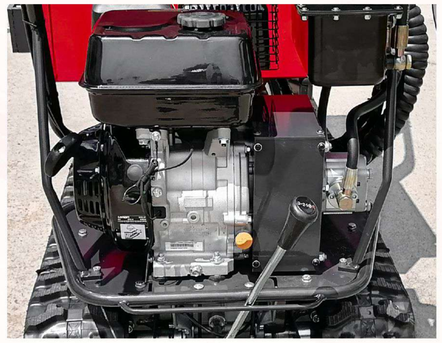

OPERATE LEFT

START THE THROTTLE


The starting and control system of the dumper is the key part to ensure the normal operation of the vehicle. The driver should be familiar with the working principle and operation guide to ensure the safe and efficient completion of the work task.

START THE THROTTLE

The powerful engine provides enough power for the dump truck, so that it can easily overcome all kinds of complex terrain, such as mounds, water nets and so on.

2400-MM

The vertical lifting design of the big arm, After tipping, the top of the bucket is 2.4m to the ground (the peer products are only 2100mm),and the bottom of the bucket is 1.46m to the ground. it can beloaded with high hurdle trucks.

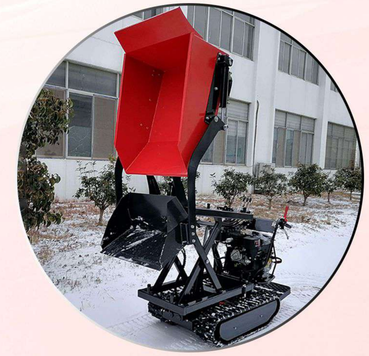

Chassis height 117mm from the ground